

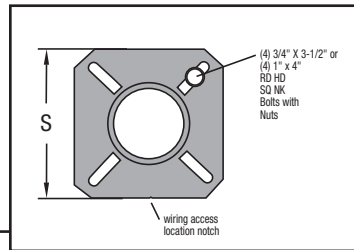
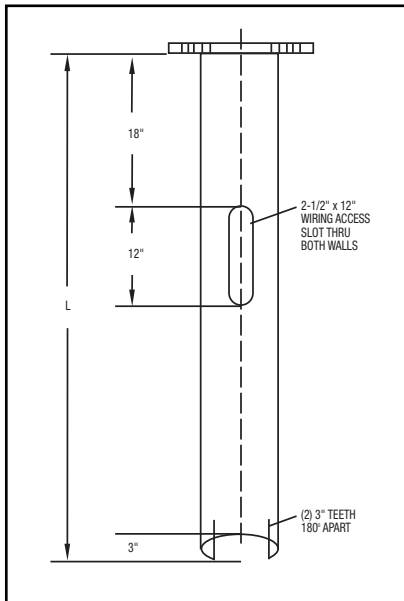


Screw-In-Anchor-Base

Catalogue Number	Pole Height	Max EPA	Max Base Moment	Max Base Shear	Bolt Circle	Shaft O.D	Shat Lenght 'L'	Pipe Shaft Size	Plate Size	Plate Material	Finish	Bolts Size	Assembly Weight
	feet	sq feet	ft lbs	lbs	inch	inch	inch	schedule	inch	PSI		inch	lbs
SCREW-BASE-16	16	7	5250	395	9-1/2 · 10-1/2	6-5/8	49	40	3/4 thick 12 sq	36,000	Hot Dipped Galvanized	3/4 x 3-1/2 (A325)	95
SCREW-BASE-1725	17 to 25 with 6' single arm	5.9	9388	493	8-1/2 · 11-1/2	6-5/8	61	40	1 thick 12 sq	36,000	Hot Dipped Galvanized	1 x 4 (A325)	125
SCREW-BASE-2530	25 to 30 with 6' single arm	3.2	10883	570	11 · 17	8-5/8	61	20	1 thick 16 sq	36,000	Hot Dipped Galvanized	1 x 4 (A325)	163
SCREW-BASE-3040	30 to 40 with 15' single arm	1.6	24381	924	11 · 17	8-5/8	85	20	1 thick 16 sq	36,000	Hot Dipped Galvanized	1 x 4 (A325)	207

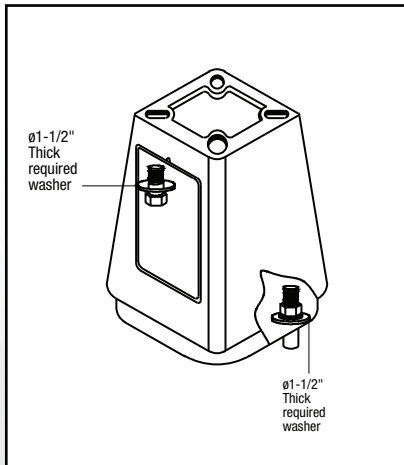

Breakaway Transformer Bases

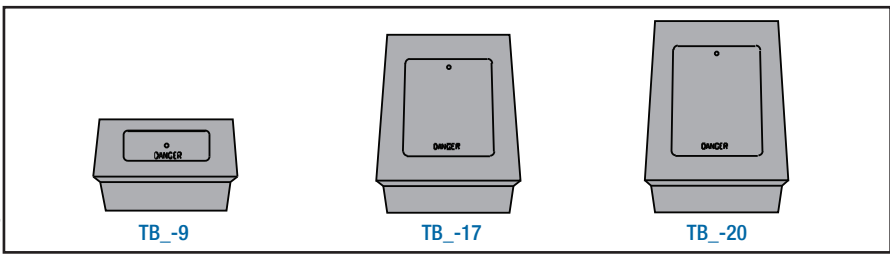

Catalogue Number	Top Bolt Circle	Bottom Bolt Circle	Square Bottom	Square Top	Access Door	Height
	inch	inch	inch	inch	inch	inch
TB5-9	14-1/2 · 15	14-1/2 · 16-1/4	15.38	14.75	11.18 X 5.50	9
TB6-9	10-1/2 · 12	10 · 12-3/4	12.72	12.25	9.25 X 5.50	9
TB7-9	16	15 · 18-5/8	17.16	16.75	11.18 X 5.50	9
TB8-9	16 · 18	16 · 21	18.98	18.5	11.18 X 5.50	9
TB1-17	10-1/2 · 13-1/2	13 · 15	15.38	13.12	9.75 X 11.75	17
TB1-17M	10-1/2 · 13-1/2	10-1/2 · 12-15/16	15.38	13.12	9.75 X 11.75	17
TB2-17	10 · 12	10 · 12	13.08	12.04	9.75 X 11.75	17
TB3-17	13 · 15-1/2	15 · 17-1/4	17.44	15.09	9.75 X 11.75	17
TB1-20	11 · 13	13 · 15	15.38	13.12	9.75 X 13.50	20
TB1-20M	11 · 13	10-1/2 · 12-15/16	15.38	13.12	9.75 X 13.50	20
TB2-20	10 · 12	10 · 12	13	12.06	9.75 X 13.50	20
TB3-20	13 · 15-1/8	15 · 17-1/4	17.44	15	9.75 X 13.50	20